










logtrec.[®]-ST

Your Benefits:

- ✓ Accurate Digital Sensor
- ✓ Automatic PDF/CSV Reporting
- ✓ Digital Certificate of Validation
- ✓ Shelf Life up to 24 Months

The logtrec.[®]-ST is designed for GDP compliant cold chain monitoring, maximum reliability and easy handling. The One-Button-Operation allows you easily start and stop the logger. All reportings such as PDF and CSV will be generated automatically. The integrated digital temperature sensor allows precise measurements during the whole temperature range. The NIST traceable certificate of validation is directly stored on the datalogger



-  **GDP Compliant**
-  **Waterproof IP67**
-  **Automatic USB Reporting**
-  **EN12830 certified**
-  **Certificate of Validation**
-  **USB Connection**
-  **Operation -30°C to +70°C**
-  **German Engineering**

-  **Food/Beverage**
-  **Pharmaceutical**
-  **Technology/Laboratory**
-  **Warehousing**

Easy Handling

- ✓ Starting the logger by pressing the button for 5sec.
- ✓ Add it to your shipment
- ✓ Unpack the goods and stop the logger by pressing the button for 5 sec.
- ✓ Connect it to the computer and get all reports automatically



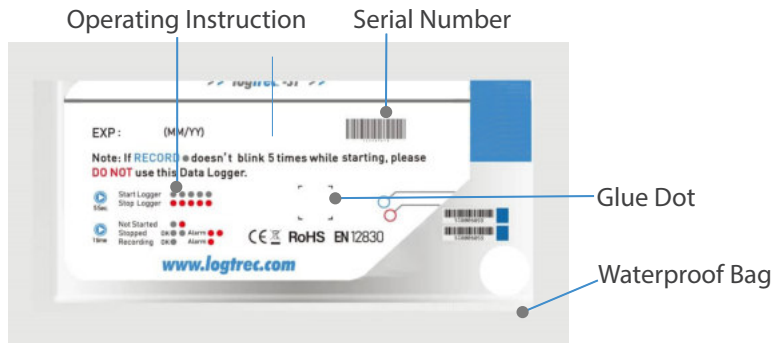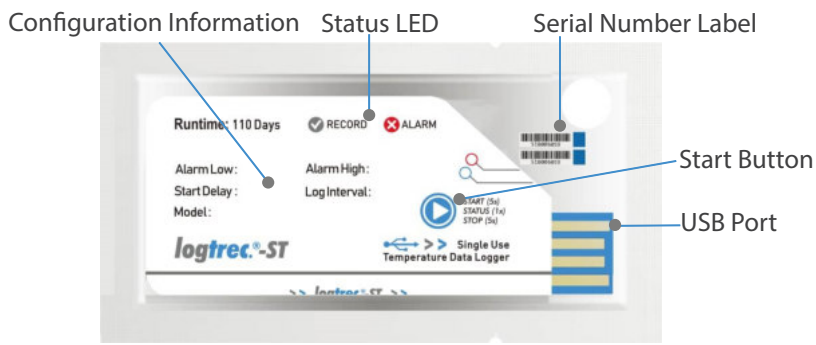


1



press the "start" button for 5 sec.

2



add the logtrec.-ST to your shipment

3



take out and stop the datalogger at it's destination

4



connect it to a computer by USB. The reports will be generated automatically

logtrec.-ST

Description	Specifications
Product Model	logtrec.-ST
Type	Single Use
Measures	Temperature
Temperature Range	-30°C-+70°C
Recording Interval	10 minutes (Standard – can be customized)
Temperature Accuracy	±0.2°C
Temperature Resolutions	0.1°C
Running Duration	110 Days (Standard) up to 180 Days (Based on Setting)
Shelf life/ Battery	Up to 24 Months
Battery	3.0V lithium Battery/CR2450
Sensor	Internal digital Sensor
Report	PDF/CSV
Auto Generate Reports	Yes
LED Indication	Yes
Alarm / Limits	Customizable (Standard not set)
Digital Certificate of validation	Yes
Validation Certificate	Six points NIST Traceable validation
Certifications	EN12830,RoHS,CE,NIST
Waterproof	IP67
Unique Serial Number	Yes
Weight	16g
Size	89mm x 49mm x 7mm (L x W x H)

